

MISTER-COMFORT™ CARTCOOL™ INSTALLATION AND OPERATING INSTRUCTIONS

INSTALLATION INSTRUCTIONS:

- 1) Locate the “J” brackets. They will attach the Support Bar/CartCool to the cart. See **Fig.1**.
- 2) Position the “J” brackets on the roof vertical supports with the long part of the “J” to the inside and pointing to the rear of the cart. Move the “J” bracket vertically to the desired location. Insert the ¼ X1.75 bolt through the first two holes and tighten.
- 3) Attach the “L” brackets to the last hole in the “J” brackets and secure with ¼ X 1.0 bolt. See **Fig.2**.
- 4) Position the Cart Cool with support bar between the 2 “L” brackets and closest to the front of the cart. Insert the ¼ X1.75 bolts through the front of the “L” brackets and the support bar. Position the support bar sleeves on the back side of the support bar and on to the bolt. Secure the bolts with a washer and nut. See **Fig.3**.

NOTE: The “J” bracket can be flipped over to accommodate wider roof supports as required.



Fig. 1



Fig. 2

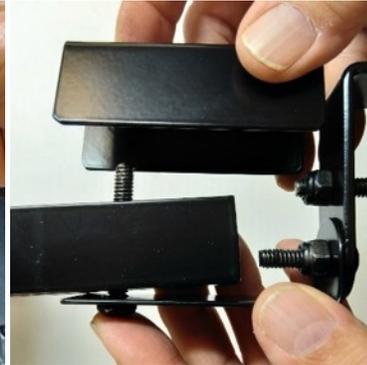


Fig. 3

- 1) Attach red/black wires to 12 volts DC from the golf cart.
 - a. For gas carts, route to the cart on/off switch such that power is applied to the CartCool mister when the switch is in the “on” position.
 - b. For Electric carts, use a voltage regulator to supply 12-volt DC power to the Cart Cool system.

OPERATING INSTRUCTIONS:

- 1) Open lid and fill water reservoir with clean water.
- 2) Turn on pump power by depressing the red power rocker button on the CartCool.
- 3) Turn MIST control valve fully clockwise until water begins to flow from the misting nozzle (this may take a couple of seconds).
- 4) Turn MIST control counter-clockwise to reduce the amount of MIST until a comfortable level is achieved.

TROUBLESHOOTING:

- 1) No Mist coming from unit
 - a. Ensure water in the tank sufficient to cover the water pump in the bottom of the reservoir

- b. Turn the mist control knob from minimum to maximum several times
- c. Remove the misting heads from the directional vents by unscrewing the nozzles. Remove the white plastic piece from the back of the nozzle by pulling straight out. Blow out both the nozzle and the white piece of plastic. Push plastic piece back into the nozzle until it seats. Re-install the nozzles.
- d. Tighten nozzles

OPTIONAL CELL PHONE HOLDER INSTALLATION:

- 1)** Remove screw holding "J" bracket to the cell phone mount
- 2)** Position "J" bracket at desired location on the support bar of the misting system or on the roof support.
- 3)** Insert supplied bolt and nut and tighten
- 4)** Mount cell phone holder back onto the "J" bracket using screw removed at step 1 above.